



Rise Beyond The Ordinary



Luhix Mechanical Equipment Co., Ltd.



Shi Chuang Electronic Business
Park, Ningbo, Zhejiang, China.



+86 (0574) 2628 4842, +(86) 158 2557 7846



info@luhixlift.com, sales@luhixlift.com



www.luhixlift.com, www.luhix.com

LUHIX[®]
Rise Beyond The Ordinary



About us 企业简介

Luhix Mechanical Equipment Co., Ltd. Is located in the city of Ningbo. Ningbo is an important port city located 240 kilometers south of Shanghai. Since it's established, the product technology of the company has always been leading in the industry worldwide.

Over the years, researchers of the company have been upgrading products and putting forward new design concepts. It has evolved to modern full-automatic production lines from semi-automatic and semi-manual production at the beginning, without man-made secondary pollution. Each product is practical and affordable with exquisite appearance; the excellent design of Human Mechanics makes the product comfortable to feel.

The company relies on first-class management and the technical team passing through the international quality system authenticating. We believe that improving the quality and lowering the cost is essential.

LUHIX continuously improve each new and old-fashioned product for excellence in order to ensure the quality of every product can make customers satisfied.



Equipment 生产设备



Applications



Directory 产品目录




Webbings for Production of Sling.....05
吊带用带料



Lash Webbings for Production of Ratchet Tie Down.....06
捆绑带用带料



Characteristics of webbing sling 07-09
吊带性能



EURO. Flat Webbing Slings..... 10-11
欧标扁平吊带



Round Sings..... 12-13
圆形吊带



American Flat Webbing Slings..... 14-15
美标扁平吊带



Endless Flat Webbing slings..... 16
圆圈带



Cargo Lashing..... 17-18
捆绑带



Ratchet Tie Down Strap.....19-20
捆绑带



Tow Strap/Winch Strap..... 21-23
拖车带/牵引带



End Fitting.....24-29
金属配件



Packing..... 30
特殊包装

Webbings for Production of Sling

吊带用带料

Polyester Webbing with width from 25mm to 300mm. Requested webbings are available as customers' requirment.
涤纶吊带带料宽度从25mm到300mm都可供应，若客户还有其他要求，我们都可满足。



1T




2T




3T




4T

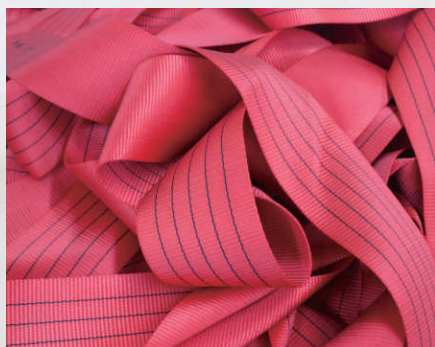


5T

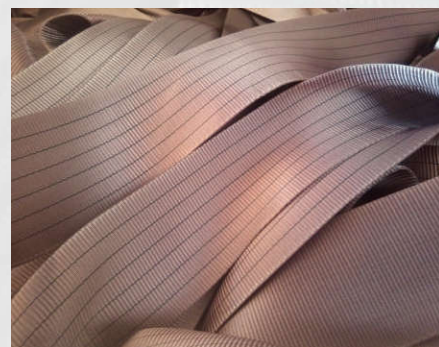


6T

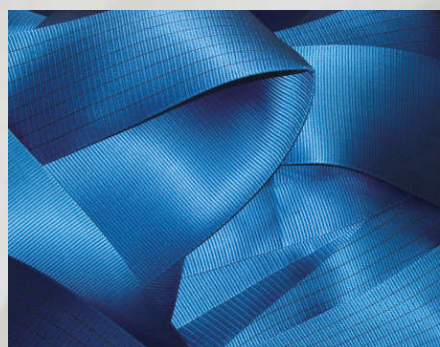

8T

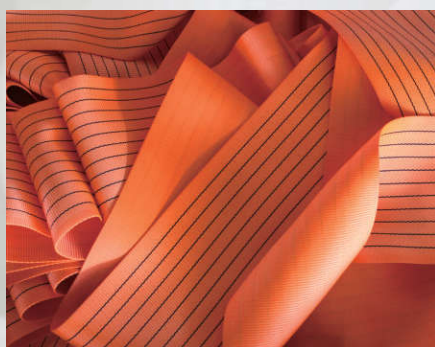

10T

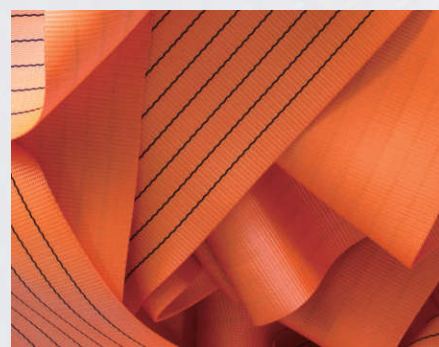

12T


Lash Webbings for Production of Ratchet Tie Down

捆绑带用带料

Polyester Webbing with width from 25mm to 100mm. Requested webbings are available as customers'requirment.
涤纶捆绑带用带料，带宽从25mm到100mm。客户要求其他宽度的带料，也可提供。



EUROPEAN TYPE BS 10TON
欧标捆绑带带料 破断10吨

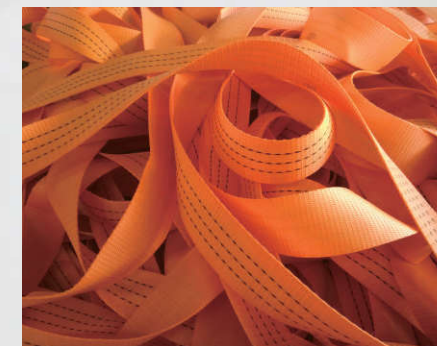

EUROPEAN TYPE BS 3TON
欧标捆绑带带料 破断3吨



EUROPEAN TYPE BS 4TON
欧标捆绑带带料 破断4吨



EUROPEAN TYPE BS 5TON
欧标捆绑带带料 破断5吨



US TYPE BS 2TON
美标捆绑带带料 破断2吨



US TYPE BS 5TON
美标捆绑带带料 破断5吨



Webbing Slings

吊帶

Characteristics of Product 产品性能


1. Material: Polyester, Polyamide, Polypropylene
2. Safety Factor: 5:1, 6:1, 7:1, 8:1
3. Length: 1m to 100m
4. Ply: Single, Double, Three and Four Ply
5. Light weight, easy to use.
6. Do not damage the lifted body.
7. High capacity, brightly colored.
8. Improve work efficiency and reduce cost.
9. High abrasion resistance, corrosion resistance, mould resistance.
10. Widely used in port and dock, chemical industry, iron and steel, mechanism, installment and other industrial fields.

1. 材质: 涤纶, 尼龙, 丙纶;
2. 安全系数: 5:1, 6:1, 7:1, 8:1;
3. 长度: 1-100米;
4. 层数: 单层, 双层, 三层, 四层;
5. 轻便, 易于使用;
6. 质软, 不会损伤起重的物体;
7. 高强度高负荷, 色泽明亮;
8. 提高工作效率, 节约成本;
9. 高耐磨性, 耐蚀性, 抗霉性;
10. 广泛应用于港口码头, 化工, 钢铁, 机械, 安装等行业。




Eye Types of Webbing Sling 吊带眼类型


TYPE HLF-ES

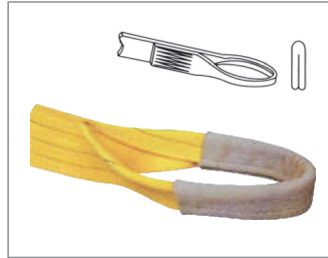


TYPE HLF-OES

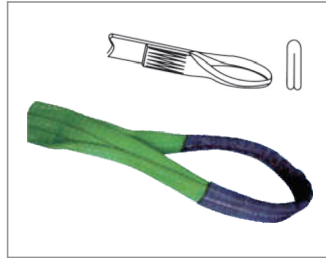


TYPE HLF-ED

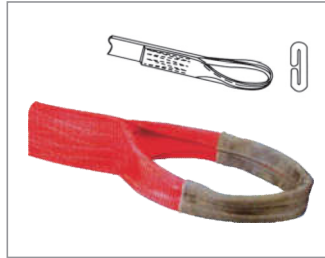


TYPE HLF-ED

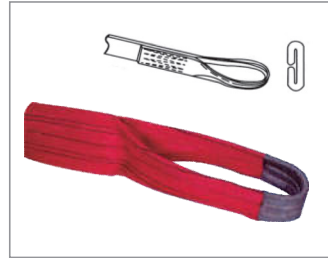

TYPE HLF-OED

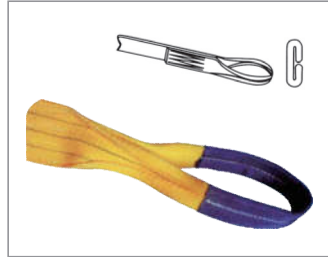


TYPE HLF-OED



TYPE HLF-EF



TYPE HLF-REF

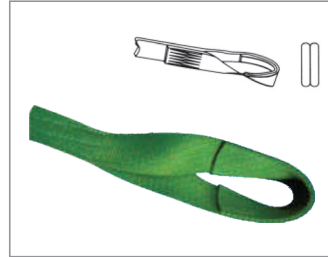

⚠ WARNING

- Shall not be loaded in excess of the rated capacity.
- Shall not be dragged on the floor or over abrasive surfaces.
- Shall not be twisted, Shortened, lengthened or tied in knots.
- Shall not be pulled from under loads that are resting on it.
- Shall not repair any damaged sling.
- Shall not be stored in chemically active area, under ultraviolet light or near heat.
- Shall always be protected from sharp edges, sharp corners or abrasive surfaces.
- Shall always inspect sling before each use.
- Shall always be inspected to ensure that the correct sling is being used.
- Shall always have the load balanced before transporting.

⚠ 注意事项

- 起重重量请勿超过相对应的吊带负荷
- 请勿在地面上或者摩擦性的表面上拖拽吊带
- 请勿扭曲，缩短，拉长或者将吊带打结
- 如果重物压在吊带上，请勿将吊带从下面强力拉出
- 请勿修复破损的吊带
- 请勿将吊带存放在化学性区域，紫外线照射强烈的地方和靠近热源的地方
- 避免吊带在尖锐的边、角和摩擦性表面受损
- 使用前检查吊带是否选择正确
- 运输前保证重物平衡



Flat Webbing Slings Eye & Eye 扁平吊带 眼&眼

Standard: EN1492-1: 2008 (Europe Standard)

Length: 1m to 12m

Material: 100% Polyester


Safety Factor: 7:1

标准: EN1492-1:2008 (欧标)

长度: 1-12米

材质: 100%涤纶

安全系数: 7倍

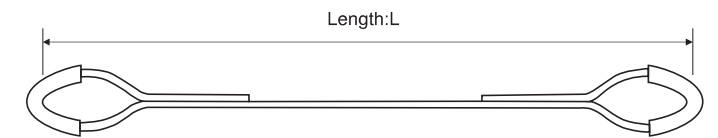

Width (mm)	WLL (Tons)	Colour	1 Webbing Sling						
			Straight (Tons)	Choker (Tons)	β				
					0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°
			1.0	0.8	2.0	1.4	1.0	0.7	0.5
30	1		1.00	0.80	2.00	1.40	1.00	0.70	0.50
60	2		2.00	1.60	4.00	2.80	2.00	1.40	1.00
90	3		3.00	2.40	6.00	4.20	3.00	2.10	1.50
120	4		4.00	3.20	8.00	5.60	4.00	2.80	2.00
150	5		5.00	4.00	10.00	7.00	5.00	3.50	2.50
180	6		6.00	4.80	12.00	8.40	6.00	4.20	3.00
240	8		8.00	6.40	16.00	11.20	8.00	5.60	4.00
300	10		10.00	8.00	20.00	14.00	10.00	7.00	5.00
300	12		12.00	9.60	24.00	16.80	12.00	8.40	6.00



Flat Webbing Slings Eye & Eye 扁平吊带 眼&眼

Standard: EN1492-1: 2008 (Europe Standard)

Length: 1m to 12m

Material: 100% Polyester



Safety Factor: 6:1 5:1

标准: EN1492-1:2008 (欧标)


长度: 1-12米

材质: 100%涤纶

安全系数: 6倍、5倍

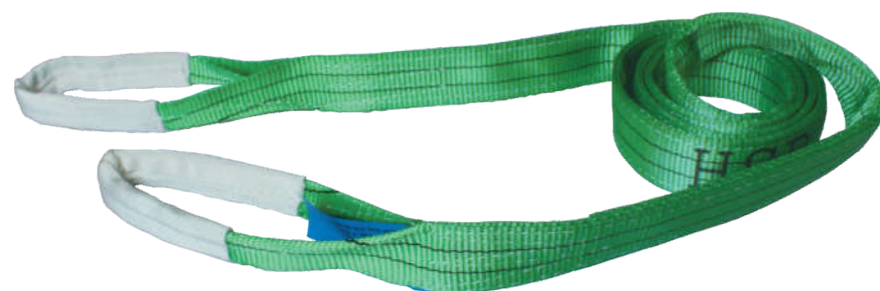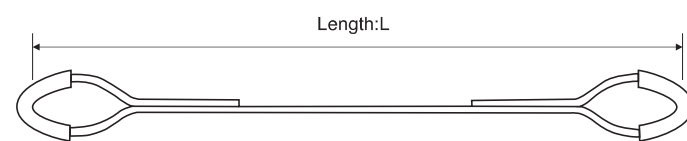

Width (mm)	WLL (Tons)	Colour	1 Webbing Sling						
			Straight (Tons)	Choker (Tons)	β				
					0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°
			1.0	0.8	2.0	1.4	1.0	0.7	0.5
25	1		1.00	0.80	2.00	1.40	1.00	0.70	0.50
50	2		2.00	1.60	4.00	2.80	2.00	1.40	1.00
75	3		3.00	2.40	6.00	4.20	3.00	2.10	1.50
100	4		4.00	3.20	8.00	5.60	4.00	2.80	2.00
125	5		5.00	4.00	10.00	7.00	5.00	3.50	2.50
150	6		6.00	4.80	12.00	8.40	6.00	4.20	3.00
200	8		8.00	6.40	16.00	11.20	8.00	5.60	4.00
250	10		10.00	8.00	20.00	14.00	10.00	7.00	5.00
300	12		12.00	9.60	24.00	16.80	12.00	8.40	6.00

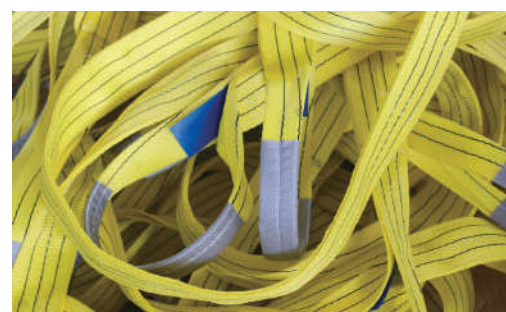

Round Slings 圆形吊带

Standard: EN1492-2: 2008 (Europe Standard)

Length: 1m to 80m

Material: 100% Polyester

Load Scope: 1T to 300T

Safety Factor: 5:1 6:1 7:1 8:1

标准: EN1492-2:2008 (欧标)

长度: 1-80米

材质: 100%涤纶

载重: 1吨-300吨

安全系数: 5倍 6倍 7倍 8倍




Colour 颜色	Colourcode according to EN1492-1 色号标准	Working load limit with 1 webbing sling 一根吊带载重限度							Working load limit with 2 webbing sling 两根吊带载重限度			
		Straight lift 垂直吊升	Choked lift 栓结吊升	0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°	Straight up to 45°	Choker up to 45°	Straight 45°- 60°	Choker 45°- 60°
		1.00	0.8	2.00	1.4	1	0.7	0.5	1.4	1.12	1	0.8
Voilet 紫色	WLL 1T	1.00	0.8	2.00	1.4	1	0.7	0.5	1.4	1.12	1	0.8
Green 绿色	WLL 2T	2.00	1.6	4.00	2.8	2	1.4	1	2.8	2.24	2	1.6
Yellow 黄色	WLL 3T	3.00	2.4	6.00	4.2	3	2.1	1.5	4.2	3.36	3	2.4
Grey 灰色	WLL 4T	4.00	3.2	8.00	5.6	4	2.8	2	5.6	4.48	4	3.2
Red 红色	WLL 5T	5.00	4	10.00	7	5	3.5	2.5	7	5.6	5	4
Brown 棕色	WLL 6T	6.00	4.8	12.00	8.4	6	4.2	3	8.4	6.72	6	4.8
Blue 蓝色	WLL 8T	8.00	6.4	16.00	11.2	8	5.6	4	11.2	8.96	8	6.4
Orange 橙色	WLL 10T	10.00	8	20.00	14	10	7	5	14	11.2	10	8
Orange 橙色	WLL 12T	12.00	9.6	24.00	16.8	12	8.4	6	16.8	13.44	12	9.6
Orange 橙色	WLL 15T	15.00	12	30.00	21	15	10.5	7.5	21	16.8	15	12
Orange 橙色	WLL 20T	20.00	16	40.00	28	20	14	10	28	22.4	20	16
Orange 橙色	WLL 25T	25.00	20	50.00	35	25	17.5	12.5	35	28	25	20
Orange 橙色	WLL 30T	30.00	24	60.00	42	30	21	15	42	33.6	30	24
Orange 橙色	WLL 50T	50.00	40	100.00	70	50	35	25	70	56	50	40
Orange 橙色	WLL 60T	60.00	48	120.00	84	60	42	30	84	67.2	60	48



Round Slings Eye & Eye 吊眼型圆形吊带

Standard: EN1492-2:2008
Length:1m-80m
Load Scope:1T to 300T
High strength and weight ration,surface smooth,no damage
Safety factor:6:1 7:1 8:1

标准: EN1492-2:2008 (欧标)
长度: 1-80米
载重: 1吨-300吨
高强度质量比, 吊带表面光滑无损伤性
安全系数: 6倍、7倍、8倍

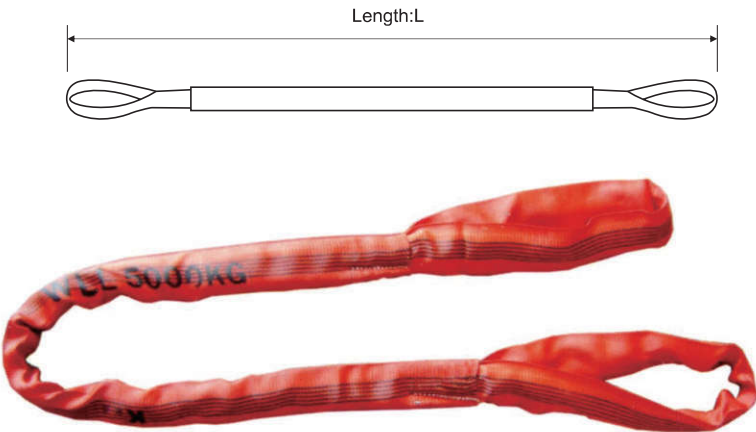


Colour 颜色	Colourcode according to EN1492-1 色号标准	Working load limit with 1 webbing sling 一根吊带载重限度							Working load limit with 2 webbing sling 两根吊带载重限度			
		Straight lift 垂直吊升	Choked lift 栓结吊升	0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°	Straight up to 45°	Choker up to 45°	Straight 45°- 60°	Choker 45°- 60°
		1.00	0.8	2.00	1.4	1	0.7	0.5	1.4	1.12	1	0.8
Voilet 紫色	WLL 1T	1.00	0.8	2.00	1.4	1	0.7	0.5	1.4	1.12	1	0.8
Green绿色	WLL2T	2.00	1.6	4.00	2.8	2	1.4	1	2.8	2.24	2	1.6
Yellow黄色	WLL 3T	3.00	2.4	6.00	4.2	3	2.1	1.5	4.2	3.36	3	2.4
Grey灰色	WLL 4T	4.00	3.2	8.00	5.6	4	2.8	2	5.6	4.48	4	3.2
Red红色	WLL 5T	5.00	4	10.00	7	5	3.5	2.5	7	5.6	5	4
Brown棕色	WLL 6T	6.00	4.8	12.00	8.4	6	4.2	3	8.4	6.72	6	4.8
Blue蓝色	WLL 8T	8.00	6.4	16.00	11.2	8	5.6	4	11.2	8.96	8	6.4
Orange橙色	WLL 10T	10.00	8	20.00	14	10	7	5	14	11.2	10	8
Orange橙色	WLL 12T	12.00	9.6	24.00	16.8	12	8.4	6	16.8	13.44	12	9.6
Orange橙色	WLL 15T	15.00	12	30.00	21	15	10.5	7.5	21	16.8	15	12
Orange橙色	WLL 20T	20.00	16	40.00	28	20	14	10	28	22.4	20	16
Orange橙色	WLL 25T	25.00	20	50.00	35	25	17.5	12.5	35	28	25	20
Orange橙色	WLL 30T	30.00	24	60.00	42	30	21	15	42	33.6	30	24
Orange橙色	WLL 50T	50.00	40	100.00	70	50	35	25	70	56	50	40
Orange橙色	WLL 60T	60.00	48	120.00	84	60	42	30	84	67.2	60	48

Flat Webbing Slings Eye & Eye 扁平吊带 眼&眼(美标)

Standard: ASME/ANSI B30.9 (American Standard) Class 7
Length: 1m to 12m
Material: 100% Polyester
Class 7, means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 9,800 lbs/inch width.

标准: ASME/ANSI B30.9(美标) 7倍
长度: 1-12米
材质: 100%涤纶
7倍, 即带料破断--9800磅/寸

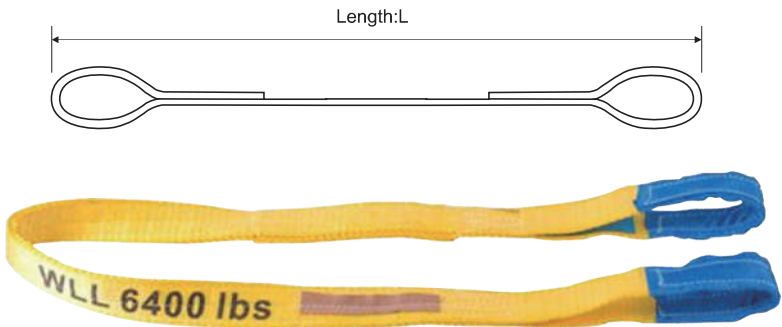


Width (mm)	M.B.S (LBS)	Working load with 1 Webbing Sling 一根吊带载重限度					
		Straight	Choker	Basket	60 Basket	45 Basket	30 Basket
		 (LBS)	 (LBS)	 (LBS)	 (LBS)	 (LBS)	 (LBS)
1	15,500	3,100	2,480	6,200	5,370	4,384	3,100
1-1/2	23,500	4,700	3,760	9,400	8,141	6,646	4,700
1-3/4	27,000	5,400	4,320	10,800	9,353	7,636	5,400
2	31,000	6,200	4,960	12,400	10,739	8,767	6,200
3	44,000	8,800	7,040	17,600	15,242	12,444	8,800
4	55,000	11,000	8,800	22,000	19,052	15,554	11,000
5	68,500	13,700	10,960	27,400	23,729	19,372	13,700
6	82,500	16,500	13,200	33,000	28,578	23,331	16,500
8	113,750	22,750	18,200	45,500	39,403	32,169	22,750
10	142,000	28,400	22,720	56,800	49,189	40,158	28,400







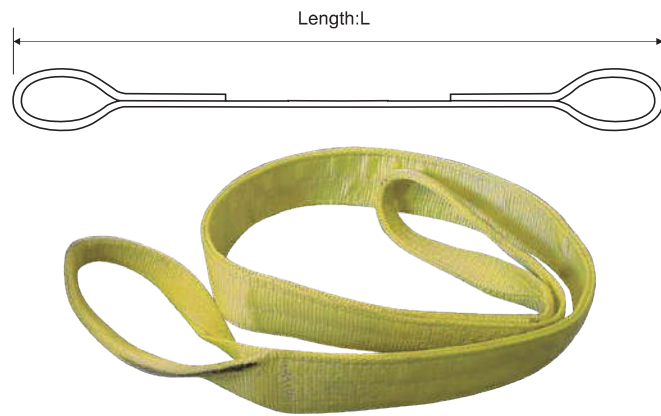

Flat Webbing Slings Eye & Eye 扁平吊带 眼&眼(美标)

Standard: ASME/ANSI B30.9 (American Standard) Class 5
Length: 1m to 12m
Material: 100% Polyester
Class 5, means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 6,800 lbs/inch width.

标准: ASME/ANSI B30.9(美标) 5倍
长度: 1-12米
材质: 100%涤纶
5倍, 即带料破断--6800磅/寸




Width	M.B.S	Working load with 1 Webbing Sling 一根吊带载重限度					
		Straight	Choker	Basket	60 Basket	45 Basket	30 Basket
(mm)	(LBS)						
		(LBS)	(LBS)	(LBS)	(LBS)	(LBS)	(LBS)
1	11000	2,200	1,760	4,400	3,811	3,111	2,200
1-1/2	16500	3,300	2,640	6,600	5,716	4,667	3,300
1-3/4	19000	3,800	3,040	7,600	6,582	5,374	3,800
2	22000	4,400	3,520	8,800	7,621	6,222	4,400
3	33000	6,600	5,280	13,200	11,432	9,333	6,600
4	41000	8,200	6,560	16,400	14,203	11,595	8,200
5	51000	10,200	8,160	20,400	17,667	14,423	10,200
6	61500	12,300	9,840	24,600	21,304	17,393	12,300









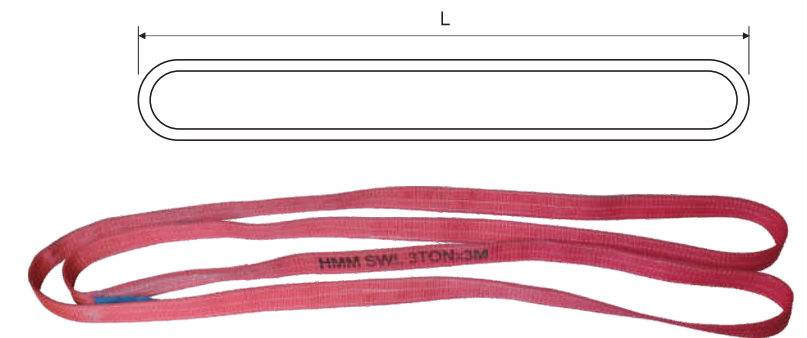













Endless Flat Webbing Slings 圆圈状扁平吊带





















Standard: EN1492-1: 2008 (Europe Standard)
Length: 1m to 12m
Material: 100% Polyester
Safety Factor: 7:1

标准: EN1492-1:2008 (欧标)
长度: 1-12米
材质: 100%涤纶
安全系数: 7倍



Width	WLL		1 Webbing Sling							2 Webbing Sling			
			Straight (Tons)	Choker (Tons)	β					Straight (Tons)	Choker (Tons)	Straight (Tons)	Choker (Tons)
(mm)	(Tons)	Colour			0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°	45°	45°	45°- 60°	45°- 60°
													
			1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.40	1.12	1.00	0.80
30	1		1.00	0.80	2.00	1.40	1.00	0.70	0.50	1.40	1.12	1.00	0.80
60	2		2.00	1.60	4.00	2.80	2.00	1.40	1.00	2.80	2.24	2.00	1.60
90	3		3.00	2.40	6.00	4.20	3.00	2.10	1.50	4.20	3.36	3.00	2.40
120	4		4.00	3.20	8.00	5.60	4.00	2.80	2.00	5.60	4.48	4.00	3.20
150	5		5.00	4.00	10.00	7.00	5.00	3.50	2.50	7.00	5.60	5.00	4.00
180	6		6.00	4.80	12.00	8.40	6.00	4.20	3.00	8.40	6.72	6.00	4.80
240	8		8.00	6.40	16.00	11.20	8.00	5.60	4.00	11.20	8.96	8.00	6.40
300	10		10.00	8.00	20.00	14.00	10.00	7.00	5.00	14.00	11.20	10.00	8.00
300	12		12.00	9.60	24.00	16.80	12.00	8.40	6.00	16.80	13.44	12.00	9.60

Safety Factor: 6:1 and 5:1

Width	WLL		1 Webbing Sling							2 Webbing Sling			
			Straight (Tons)	Choker (Tons)	β					Straight (Tons)	Choker (Tons)	Straight (Tons)	Choker (Tons)
(mm)	(Tons)	Colour			0°- 7°	7°- 45°	45°- 60°	Up to 45°	45°- 60°	45°	45°	45°- 60°	45°- 60°
													
			1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.40	1.12	1.00	0.80
25	1		1.00	0.80	2.00	1.40	1.00	0.70	0.50	1.40	1.12	1.00	0.80
50	2		2.00	1.60	4.00	2.80	2.00	1.40	1.00	2.80	2.24	2.00	1.60
75	3		3.00	2.40	6.00	4.20	3.00	2.10	1.50	4.20	3.36	3.00	2.40
100	4		4.00	3.20	8.00	5.60	4.00	2.80	2.00	5.60	4.48	4.00	3.20
125	5		5.00	4.00	10.00	7.00	5.00	3.50	2.50	7.00	5.60	5.00	4.00
150	6		6.00	4.80	12.00	8.40	6.00	4.20	3.00	8.40	6.72	6.00	4.80
200	8		8.00	6.40	16.00	11.20	8.00	5.60	4.00	11.20	8.96	8.00	6.40
250	10		10.00	8.00	20.00	14.00	10.00	7.00	5.00	14.00	11.20	10.00	8.00
300	12		12.00	9.60	24.00	16.80	12.00	8.40	6.00	16.80	13.44	12.00	9.60

Cargo Lashing

捆绑带

Cargo Lashing 捆绑带


Cargo Lashing is used for tying down loads while transporting, shifting, moving or storage. It has such performance as fastening, safety, lightness, convenience and easiness to operate, and protection of bodies from damage.

By using different hooks, it can be fit for all kinds of enviroment and has replaced traditional jute ropes, chains and wires used for transportation and for a variety of other applications.

捆绑带用于货物运输，提升，搬运或者存储货物时的捆扎固定。

捆绑带紧固，轻便，方便，易于操作，并且可以保护物体免于破损。

与不同的钩子搭配，捆绑带可用于各种各样的环境，逐渐取代传统的麻绳，链条，钢丝绳等用于运输的工具，并且在更广的范围内应用。

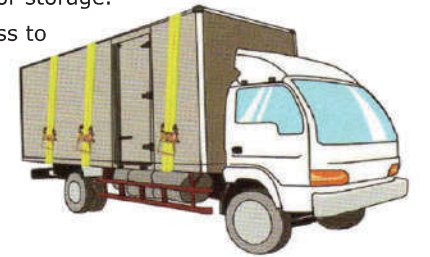

▲ WARNING

- Inspect the Lashing for damage before each use.
- Do not use if there are any signs of damages, e.g. cut webbing, hot surfaces, sharp edges and acids.
- Observe the Working Load Capacity on the label applied to the load mode.
- Tighten the lashing manually before using the tensioning device.
- Use corner protectors for sharp edges.
- Avoid excessive heat i.e. exceeding +100°C.

▲ 注意事项

- 每次使用前要检查捆绑带是否破损
- 使用前发现有可能使带子破损的征兆——如能切断带子，高温表面，尖锐边缘，酸等，请勿使用
- 查看带子标签上的工作负荷是否与起重物所需负荷一致
- 使用张紧设备前，手动拧紧拉紧器
- 尖锐边角使用护角
- 避免超过温度，例如超过+100度

Ratchet Tie Down Strap 捆绑带

Standard: EN12195-2: 2001 标准: EN12195-2: 2001


HLF-RTD25/01



Size: 1" and 25mm Length: 4-12m
Load Capacity: 400kg(880LBS) / 500kg(1100LBS)
Breaking Strength: 800kg(1760LBS) / 1000kg(2200LBS)
Material: Polyester Colour: Any Colour
End Fitting: S hook / Double J Hook

规格: 1" 25mm 长度: 4-12米
工作负荷: 400kg(880磅)/500kg(1100磅)
破断: 800kg(1760磅) / 1000kg(2200磅)
材质: 涤纶 颜色: 任意 配件: S 钩/双J钩

HLF-RTD30/0116

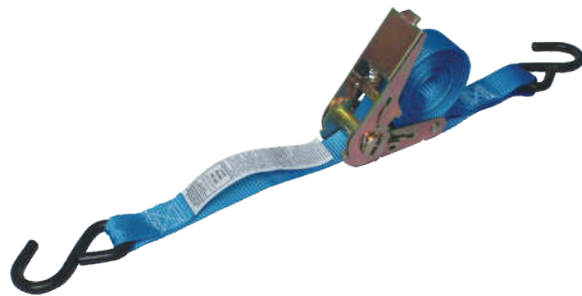

Size: 1-1/16" and 30mm Length: 4-12m
Load Capacity: 600kg(1320LBS) / 750kg(1650LBS)
Breaking Strength: 1200kg(2640LBS) / 1500kg(3300LBS)
Material: Polyester Colour: Any Colour
End Fitting: J Hook / S Hook

规格: 1-1/16" 长度: 4-12米
工作负荷: 600kg(1320磅)/750kg(1650磅)
破断: 1200kg(2640磅) / 1500kg(3300磅)
材质: 涤纶 颜色: 任意 配件: J钩/S钩

HLF-RTD35/015



Size: 1.5" and 35mm Length: 4-12m
Load Capacity: 1000kg / 2200LBS
Breaking Strength: 2000kg / 4400LBS
Material: Polyester Colour: Any Colour
End Fitting: Double J Hook / J Hook

规格: 1.5" 35mm 长度: 4-12米
工作负荷: 1000kg(2200磅)
破断: 2000kg(4400磅)
材质: 涤纶 颜色: 任意 配件: 双J钩/J钩

HLF-RTD38/015



Size: 1.5" and 38mm Length: 4-12m
Load Capacity: 1500kg / 3300LBS
Breaking Strength: 3000kg / 6600LBS
Material: Polyester Colour: Any Colour
End Fitting: Double J Hook / J Hook

规格: 1.5" 38mm 长度: 4-12米
工作负荷: 1500kg(3300磅)
破断: 3000kg(6600磅)
材质: 涤纶 颜色: 任意 配件: 双J钩/J钩

Ratchet Tie Down Strap 捆绑带

Standard: EN12195-2: 2001 标准: EN12195-2: 2001

HLF-RTD50/02-4000



Size: 2" and 50mm Length: 4-12m
Load Capacity: 2000kg / 4400LBS
Breaking Strength: 4000kg / 8800LBS
Material: Polyester
Colour: Any Colour
End Fitting: J Hook / Double J Hook

规格: 2" 50mm 长度: 4-12米
工作负荷: 2000kg/4400磅
破断: 4000kg/8800磅
材质: 涤纶
颜色: 任意颜色
配件: J钩/双J钩


HLF-RTD50/02-5000



Size: 2" and 50mm Length: 4-12m
Load Capacity: 2500kg / 5500LBS
Breaking Strength: 5000kg / 11000LBS
Material: Polyester
Colour: Any Colour
End Fitting: Double J Hook / J Hook

规格: 2" 50mm 长度: 4-12米
工作负荷: 2500kg/5500磅
破断: 5000kg/11000磅
材质: 涤纶
颜色: 任意颜色
配件: 双J钩/J钩

HLF-RTD75/03

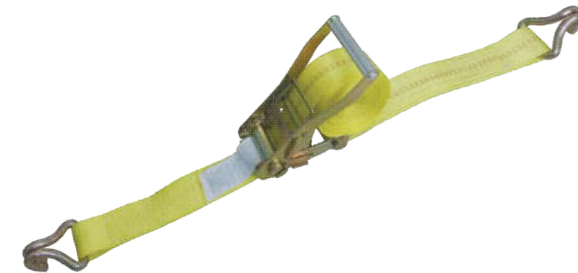

Size: 3" 75mm/4" 100mm
Length: 4-12m
Load Capacity: 5000kg / 11000LBS
Breaking Strength: 10000kg / 22000LBS
Material: Polyester
Popular Colour: Yellow and Orange
End Fitting: Double J Hook or Flat Hook

规格: 3" 75mm或4" 100mm 长度: 4-12米
工作负荷: 5000kg/11000磅
破断: 10000kg/22000磅
材质: 涤纶
主打颜色: 黄色、橘黄色
配件: 双J钩/板钩



Tow Strap/
Winch Strap

拖车带



Tow Strap/Winch Strap 拖车带

HLF-TSP1001



Size: 2"*20'

Belt Width: 50mm

Working Load Limit: 3,300 LBS

Breaking Strength: 10,000LBS

End Fitting: Forged Eye Hook

Length Choosable:13', 20' and 26'

规格: 2"*20'

带宽: 50mm

工作负荷: 3300磅

破断: 10000磅

配件: 模锻眼钩

长度可选: 13' 20' 26'

HLF-TSP2001



Item 货号	Size 规格	End Fitting 配件 板钩	W.L.L. 工作拉力 磅	M.B.S. 破断拉力 磅
HLF-TSP2001-227	2" * 27'	Flat Hook	3,300 LBS	10,000 LBS
HLF-TSP2001-230	2" * 30'	Flat Hook	3,300 LBS	10,000 LBS
HLF-TSP2001-327	3" * 27'	Flat Hook	5,000 LBS	15,000 LBS
HLF-TSP2001-330	3" * 30'	Flat Hook	5,000 LBS	15,000 LBS
HLF-TSP2001-427	4" * 27'	Flat Hook	5,400 LBS	16,400 LBS
HLF-TSP2001-430	4" * 30'	Flat Hook	5,400 LBS	16,400 LBS

HLF-TSP2002



Item 货号	Size 规格	End Fitting 配件 双J钩三角环	W.L.L. 工作拉力 磅	M.B.S. 破断拉力 磅
HLF-TSP2002-327	3" * 27'	Double J Hook or Forged Triangle	5,000 LBS	15,000 LBS
HLF-TSP2002-330	3" * 30'	Double J Hook or Forged Triangle	5,000 LBS	15,000 LBS
HLF-TSP2002-427	4" * 27'	Double J Hook or Forged Triangle	5,400 LBS	16,400 LBS
HLF-TSP2002-430	4" * 30'	Double J Hook or Forged Triangle	5,400 LBS	16,400 LBS

Tow Strap/Winch Strap 拖车带

HLF-TS3001



Item 货号	Size 规格	End Fitting 两端加强眼型	W.L.L. 工作拉力 磅	M.B.S. 破断拉力 磅
HLF-TS3001-227	2" * 27'	Reinforced Eye	3,300 LBS	10,000 LBS
HLF-TS3001-230	2" * 30'	Reinforced Eye	3,300 LBS	10,000 LBS
HLF-TS3001-327	3" * 27'	Reinforced Eye	5,000 LBS	15,000 LBS
HLF-TS3001-330	3" * 30'	Reinforced Eye	5,000 LBS	15,000 LBS
HLF-TS3001-427	4" * 27'	Reinforced Eye	5,400 LBS	16,400 LBS
HLF-TS3001-430	4" * 30'	Reinforced Eye	5,400 LBS	16,400 LBS

HLF-TS4001



Item 货号	Size 规格	End Fitting 两端加强眼型	W.L.L. 工作拉力 磅	M.B.S. 破断拉力 磅
HLF-TS4001-327	3" * 27'	Chain Anchor Assy	5,000 LBS	15,000 LBS
HLF-TS4001-330	3" * 30'	Chain Anchor Assy	5,000 LBS	15,000 LBS
HLF-TS4001-427	4" * 27'	Chain Anchor Assy	5,400 LBS	16,400 LBS
HLF-TS4001-430	4" * 30'	Chain Anchor Assy	5,400 LBS	16,400 LBS

End Fitting 配件

Ratchet Buckle 拉紧器



HLF-RB1-01
Size: 1" / 25mm
Breaking Strength(破断):
800kg/1760 LBS
Handle: Steel(铁柄)



HLF-RB2-01
Size:1"/25mm
Breaking strength(破断):
800kg/1760LBS



HLF-RB3-116
Size: 1-1/16" / 28mm
Breaking Strength(破断):
1500kg/3300 LBS
Handle: Steel(铁柄)



HLF-RB4-116
Size: 1-1/16" / 28mm
Breaking Strength(破断):
1500kg/3300 LBS
Handle: Steel(铁柄)



HLF-RB5-015
Size: 1.5" / 35mm
Breaking Strength(破断):
2000kg/4400 LBS
Handle: Steel(铁柄)



HLF-RB6-015
Size: 1.5" / 35mm
Breaking Strength(破断):
3000kg/6600 LBS
Handle: Plastic(塑柄)



HLF-RB7-015
Size: 1.5"
Breaking Strength(破断):
3000kg/6600LBS
Handle: Steel(铁柄)



HLF-RB8-02
Size: 2" / 50mm
Breaking Strength(破断):
5000kg/11000 LBS
Handle: Plastic(塑柄)



HLF-RB9-02
Size: 2" / 50mm
Breaking Strength(破断):
5000kg/11000 LBS
Handle: Plastic(塑柄)



HLF-RB10-02
Size: 2" / 50mm
Breaking Strength(破断):
5000kg/11000LBS
Handle: Plastic(塑柄)



HLF-RB11-02
Size:2"
Breaking Strength(破断):
5000kg/11000LBS
Handle: Plastic(塑柄)



HLF-RB12-02
Size:2"
Breaking Strength(破断):
5000kg/11000LBS
Handle: Plastic(塑柄)

End Fitting 配件

Ratchet Buckle 拉紧器



HLF-RB11-02
Size:2"
Breaking Strength(破断):
5000kg/11000LBS
Handle:Steel(铁柄)



HLF-RB14-02
Size:2"
Breaking Strength(破断):
5000kg/11000LBS
Handle: Steel(铁柄)



HLF-RB15-02
Size:2"
Breaking Strength(破断):
5000kg/11000LBS
Handle: Plastic(塑柄)



HLF-RB16-02
Size:2"
Breaking Strength(破断):
800kg/1760LBS



HLF-RB17-02
Size:2"
Breaking Strength(破断):
800kg/1760LBS



HLF-RB18-02
Size:2"
Breaking Strength(破断):
800kg/1760LBS



HLF-RB19-03
Size: 3" / 75mm
Breaking Strength(破断):
10000kg/22000 LBS
Handle: Aluminium(铝柄)



HLF-RB20-04
Size: 4" / 100mm
Breaking Strength(破断):
10000kg/22000 LBS
Handle:Aluminium(铝柄)

Cam Buckle 合扣



HLF-CB0101
Size: 1"
Breaking Load: (破断)
545kg/1200LBS



HLF-CB0215
Size: 1.5"
Breaking Load: (破断)
500kg/1100LBS





HLF-CB0302
Size: 2"
Breaking Load: (破断)
1360kg/3000LBS






HLF-CB0402
Size: 2"
Breaking Load:(破断)
700kg/1540LBS

End Fitting 配件


Double J Hook/J HOOK 双J钩/J钩









HLF-JH01-2
Size:2"
Breaking Load:破断
1500kg/3300LBS




HLF-JH02-15
Size:1.5"
Breaking Load:破断
3000kg/6600LBS




HLF-JH03-2
Size:2"
Breaking Load:破断
5000kg/11000LBS




HLF-JH04015
Size:1.5"
Breaking Load:破断
3000kg/6600LBS




HLF-JH0502
Size:2"
Breaking Load:破断
5000kg/11000LBS




HLF-JH06015
Size:1.5"
Breaking Load:破断
3000kg/6600LBS



HLF-JH0702
Size:2"
Breaking Load:破断
5000kg/11000LBS



HLF-JH08015
Size:1.5"
Breaking Load:破断
3000kg/6600LBS



HLF-JH0902
Size:2"
Breaking Load:破断
5000kg/11000LBS

Item	Size	Breaking Load (kg)	Measurement (mm)				
			A	B	C	d	D
HLF-DJH01	1"	800/1000	27	47	21	11	6.5
HLF-DJH116	1-1/16"	1500	28	56	28	17	7
HLF-DJH112	1-1/2"	2000	38	65	30	18	8.5
HLF-DJH112	1-1/2"	3000	38	86	35	18	9.5
HLF-DJH112	1-1/2"	3000	38	68	30.5	17	9.5
HLF-DJH022	2"	2000	51	85	33	20	8
HLF-DJH023	2"	3000	52	85	33	20	9.5
HLF-DJH024	2"	4000	52	85	35	20	10.5
HLF-DJH025	2"	5000	52	96	47	20	11.5
HLF-DJH025	2"	5000	52	108	36	20	11.5
HLF-DJH025	2"	5000	52	85	38	20	11.5
HLF-DJH026	2"	6000	52	85	38	20	12.4
HLF-DJH03	3"	8000	77	136	45	20	16
HLF-DJH04	4"	10000	10.3	140	52	22	17

End Fitting 配件

Flat Hook 板钩

Drawings	Item	Size	Breaking Load		Measurement (mm)			
			(LBS)	(kg)	A	C (OL)	d1	d2
	HLF-FH0210	2"	10000	4540	47.4	92	17	4.5
	HLF-FH0211	2"	11000	5000	51	97	18	5
	HLF-FH0316	3"	16200	7365	70	93	17	5
	HLF-FH0101 Size: 1" Breaking Load: 破断 1600kg/3500LBS							
	HLF-FH0201 Size: 1" Breaking Load: 破断 350kg/7700LBS							
	HLF-FH0301 Size: 1" Breaking Load: 破断 1600kg/3500LBS							
	HLF-FH0402 Size: 2" Breaking Load: 破断 4000kg/8800LBS							
	HLF-FH0502 Size: 2" Breaking Load: 破断 4500kg/9900LBS							
	HLF-FH0604 Size: 4" Breaking Load: 破断 7000kg/15400LBS							

S Hook S钩

Drawings	Item	Size	Breaking Load		Measurement (mm)			
			(LBS)	(kg)	d1 A	d2	d3	D
	HLF-SH0101	1"	1540	700	25	25	8	102
	HLF-SH0102	1"	1760	800	25	25	9	102
	HLF-SH0103	1"	2200	1000	22	25	10	120
	HLF-SH0104	1"	2200	1000	22	23	12	95
	HLF-SH0201 Size: 1" D=9mm d1=25mm L=110mm Breaking Load: 800kg/1760LBS							
	HLF-SH0301 Size: 1" D=39mm d1=22mm L=80mm Breaking Load: 800kg/1760LBS							
	HLF-SH0401 Size: 1" D=9mm d1=25mm L=100mm Breaking Load: 1500kg/3300LBS							
	HLF-SH0501 Size: 1" D=9mm d1=25mm L=100mm Breaking Load: 800kg/1760LBS							
	HLF-SH0601 Size: 1" d1=24mm L=121mm Breaking Load: 800kg/1760LBS							
	HLF-SH0701 Size: 1" D=11mm d1=25mm L=95mm Breaking Load: 1500kg/3300LBS							
	HLF-SH0801 Size: 1" d1=25mm L=94mm Breaking Load: 1500kg/3300LBS							
	HLF-SH0901 Size: 1" D=9mm d1=25mm L=110mm Breaking Load: 800kg/1760LBS							
	HLF-SH1001 Size: 1" D=39mm d1=22mm L=80mm Breaking Load: 800kg/1760LBS							

End Fitting 配件

Hook series/Connect plate 扁钩系列

	ART. NO.: HLF-HS01 Size: 50mm Breaking Load :2700kg/4500kg 货号: HLF-HS01 规格: 50mm 破断: 2700kg/4500kg		ART. NO.: HLF-HS02 Size: 50mm Breaking Load: 2700kg 货号: HLF-HS02 规格: 50mm 破断: 2700kg
	ART. NO.: HLF-HS03 Size: 45mm Breaking Load: 2200kg 货号: HLF-HS03 规格: 45mm 破断: 2200kg		ART. NO.: HLF-HS04 Breaking Load: 2000kg 货号: HLF-HS04 破断: 2000kg
	ART. NO.: HLF-HS05 Width: 45mm Breaking Load: 800kg 货号: HLF-HS05 宽度: 45mm 破断: 800kg		ART. NO.: HLF-HS06 Width: 50mm Breaking Load: 5000kg 货号: HLF-HS06 宽度: 50mm 破断: 5000kg
	ART. NO.: HLF-HS07 Width: 50mm Breaking Load: 5000kg 货号: HLF-HS07 宽度: 50mm 破断: 5000kg		ART. NO.: HLF-HS08 Width: 35mm Breaking Load: 3000kg 货号: HLF-HS08 宽度: 35mm 破断: 3000kg
	ART. NO.: HLF-CP01 Breaking Load: 3000kg 货号: HLF-CP01 破断: 3000kg		ART. NO.: HLF-CP02 Breaking Load: 1000kg 货号: HLF-CP02 破断: 1000kg
	ART. NO.: HLF-CP03 Breaking Load: 11000kg 货号: HLF-CP03 破断: 11000kg		ART. NO.: HLF-CP04 Breaking Load: 2270kg 货号: HLF-CP04 破断: 2270kg
	ART. NO.: HLF-CP05 Breaking Load: 680kg 货号: HLF-CP05 破断: 680kg		ART. NO.: HLF-CP06 Breaking Load: 3000kg 货号: HLF-CP06 破断: 3000kg

End Fitting 配件

Ring 环



HLF-R1-50
Size: 50mm
Breaking Load: (破断)
5000kg/11000LBS



HLF-R2-40
Size: 40mm
Breaking Load: (破断)
3000kg/6600LBS



HLF-R3-50
Size: 50mm
Breaking Load: (破断)
5000kg/11000LBS



HLF-R4-30
Size: 30mm
Breaking Load: (破断)
3000kg/6600LBS



HLF-R5-35
Size: 35mm
Breaking Load: (破断)
3000kg/6600LBS



HLF-R6-2
Size: 2"
Breaking Load: (破断)
1100kg/2420LBS



HLF-R7-2
Size: 2"
Breaking Load: (破断)
5000kg/11000LBS



HLF-R8-2
Size: 2"
Breaking Load: (破断)
5000kg/11000LBS



HLF-R9-2
Size: 2"
Breaking Load: (破断)
2000kg/4400LBS

Shaped Hook



HLF-R10-2
Size: 2"
Breaking Load: (破断)
5000kg/11000LBS



HLF-R11-1.5
Size: 1.5"
Breaking Load: (破断)
3000kg/6600LBS



HLF-R12-2
Size: 1.5"/2"
Breaking Load: (破断)
3000kg/6600LBS

Packing 包装

